

# CR123A

# LITHIUM MANGANESE DIOXIDE




### Features & Benefits

- Operating temperature range between -40° C to +70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability


### Specifications

Nominal Capacity:	1550 mAh
Nominal Voltage:	3V
Weight:	Approximately 17g
Operating Temperature:	-40° C - +70° C

### Dimensions

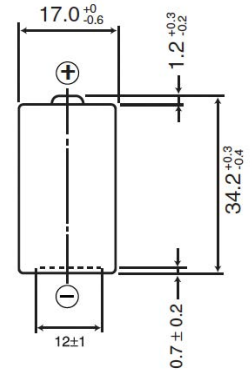


### Temperature Characteristics

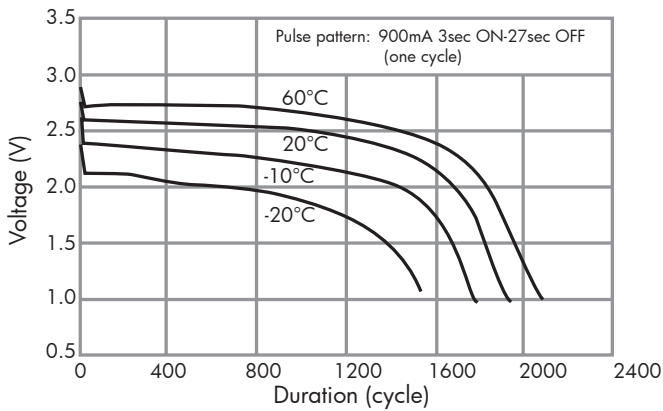


\*Please consult Panasonic for use below and above -20°C to +60°C


### Continuous Discharge Characteristics (60° C)

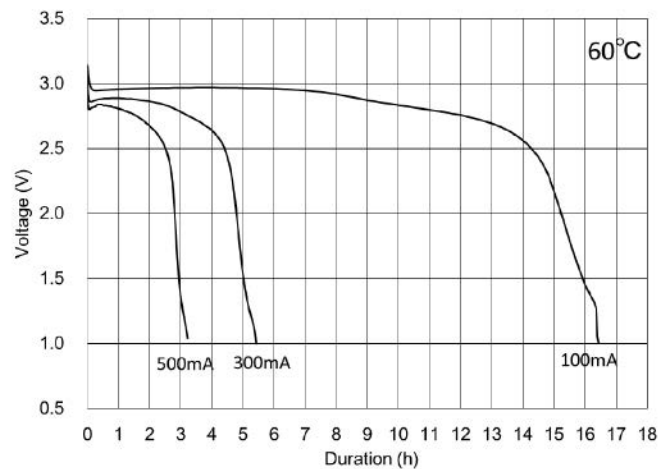

### Continuous Discharge Characteristics (20° C)

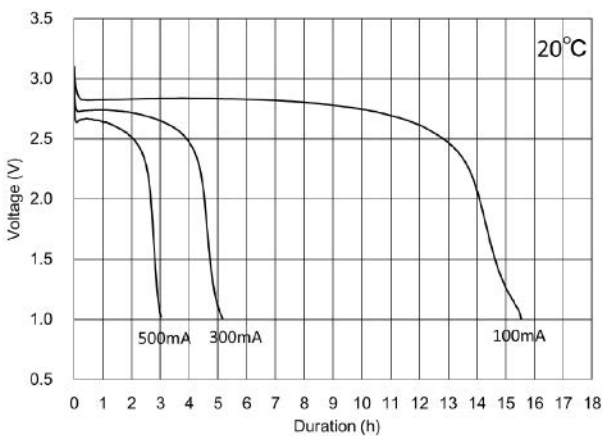

### Continuous Discharge Characteristics (-20° C)

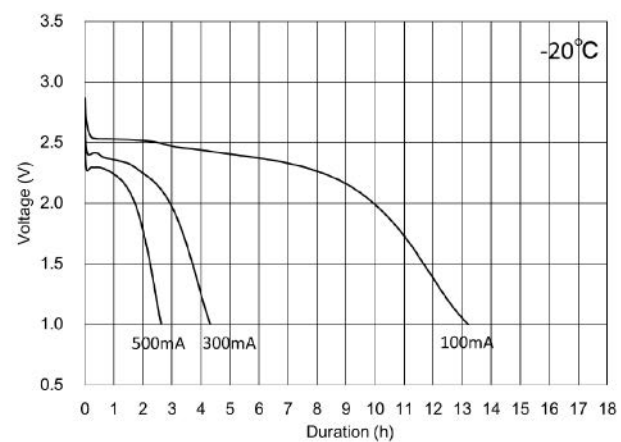

For more information on how Panasonic can assist you with your battery power solution needs call 877-726-2228 visit [www.na.industrial.panasonic.com/products/batteries](http://www.na.industrial.panasonic.com/products/batteries) or e-mail [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com)

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.